



1x4 HDMI 2.0 Splitter with Scaler/Audio Extract



User Manual

VER 1.0

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

| | |
|------------------------------------------------|----------|
| 1. Introduction..... | 3 |
| 2. Features..... | 3 |
| 3. Package Contents..... | 4 |
| 4. Specifications..... | 4 |
| 5.Operation Controls and Functions..... | 6 |
| 5.1 Front Panel..... | 6 |
| 5.2 Rear Panel..... | 7 |
| 6. Application Example..... | 8 |

1. Introduction

The 1x4 HDMI 2.0 Splitter simultaneously one route HDMI source to four routes HDMI display. It supports resolution up to 4K2K@60Hz (4:4:4) and HDCP 2.2. This product supports audio extract from HDMI source to optical and analog output. It can be selected COPY, AUTO modes EDID setting. Output supports bypass and downscaler(4K->1080P) function.

2. Features

- ☆ HDMI 2.0b, HDCP2.2/HDCP1.4 compliant.
- ☆ Supports HDMI resolution the maximum up to 4K2K@50/60Hz (4:4:4)
- ☆ Supports digital and analog audio extract output from HDMI source.
- ☆ Supports output bypass and 4K->1080P downscaler function via dial switch on panel.
- ☆ EDID can be selected COPY and AUTO modes via dial switch on panel.

(COPY: It copies OUT 1 port EDID setting to all outputs port, If no HDMI OUT 1 capable EDID is detected then the unit will copy HDMI OUT 2. If no HDMI OUT 1~2 capable

EDID is detected then the unit will copy HDMI OUT 3...etc.
The priority order is OUT 1 to OUT 4.

AUTO: Compare OUT 1~OUT 4 EDID setting and output the best resolution to all outputs).

- ☆ Supports analog audio PCM 2.0.
- ☆ Supports optical audio pass-through format about LPCM 2.0/2.1/5.1CH, Dolby 5.1, Dolby True HD, Dolby DD+, DTS 5.1, DTS-ES 6/DTS-HDMA 5.1, DTS HD-HRA 5.1.

3. Package Contents

- ① 1× 1×4 HDMI 2.0 Splitter
- ② 1× 5V/1A Power Adapter
- ③ 1× User Manual


4. Specifications

| Technical | |
|--------------------|------------------------------------------------------------------------------------------------------------|
| HDMI Compliance | HDMI 2.0b |
| HDCP Compliance | HDCP 2.2 and HDCP 1.4 |
| Video Bandwidth | 18Gbps |
| Video Resolutions | 720P@50/60Hz, 1080P@50/60Hz, 4K2K@24Hz, 4K2K@30Hz, 4K2K@50/60Hz (4:4:4) |
| Color Depth | 4K60Hz 8-bit, 1080P 12-bit |
| Color Space | RGB, YCbCr 4:4:4, YCbCr 4:2:2 |
| HDMI Audio Formats | LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD |

| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------|
| L/R Audio Formats | PCM 2.0 |
| Optical Audio Formats | LPCM [2.0/2.1]CH, Dolby 5.1, Dolby True HD, Dolby DD+, DTS 5.1, DTS-ES 6, DTS-HDMA 5.1, DTS HD-HRA 5.1 |
| ESD Protection | Human-body Model: ± 8kV (Air-gap discharge) , ± 4kV (Contact discharge) |
| Connections | |
| Input ports | 1 × HDMI Type A [19-pin female] |
| Output ports | 4 × HDMI Type A [19-pin female] 1 × L/R Audio out [3.5mm Stereo Mini-jack] 1 × Optical out [S/PDIF] |
| Mechanical | |
| Housing | Metal Enclosure |
| Color | Black |
| Dimensions | 180mm(W) × 62mm(D) × 14mm(H) |
| Weight | 227g |
| Power Supply | Input: AC100~240V 50/60Hz, Output: DC5V/1A (US/EU standards, CE/FCC/UL certified) |
| Power Consumption | 3.5W (max) |
| Operating Temperature | 0° C ~ 40° C / 32° F ~ 104° F |
| Storage Temperature | -20° C ~ 60° C / -4° F ~ 140° F |
| Relative Humidity | 20~90% RH (non-condensing) |

5.Operation Controls and Functions


5.1 Front Panel



| Number | Name | Function description |
|--------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | POWER LED | This blue LED will illuminate when the unit has connected power supply. |
| 2 | HDMI INPUT LED | This blue LED will illuminate when the HDMI IN has connected an active HDMI source device with a HDMI cable. |
| 3 | HDMI OUTPUT LED | These blue LEDs will illuminate when the HDMI OUT port has connected an avtice display device with a HDMI cable. |
| 4 | SERVICE port | Fireware update used. (Manufacturer use only.) |
| 5 | EDID | <ul style="list-style-type: none">• AUTO: Compare the EDID setting of the HDMI OUT 1~ 4 port display device, then transmit the best EDID signal to source device, the source device will transmit again the EDID signal to all outputs.• COPY: Copy the HDMI OUT 1 port EDID setting to source device(If no HDMI OUT 1 capable EDID is detected then the unit will copy HDMI OUT 2. If no HDMI OUT 1~2 capable EDID is detected then the unit will copy HDMI OUT 3...etc. The priority order is OUT 1 to OUT 4), the source device will |

| | | |
|---|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | transmit again the signal to all outputs. |
| 6 | Dial switch (4K→ 1080P) | OFF: When the dial switch is dialled in ‘OFF’ position, signal input and output is bypass status. ON: When the dial switch is dialled in ‘ON’ position, signal input will downscale(4k->1080P) output. |

5.2 Rear Panel

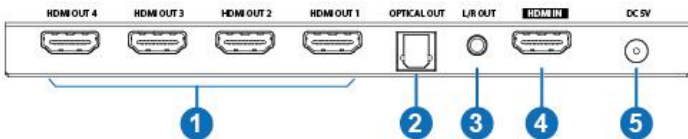

| Number | Name | Function description |
|--------|-------------|-----------------------------------------------------------------------------------------|
| 1 | HDMI OUTPUT | Connect to HDMI display device such as TV or monitor. |
| 2 | OPTICAL OUT | Optical audio output. (This port outputs audio from HDMI IN port.) |
| 3 | L/R OUT | Analog audio output. (This port outputs audio from HDMI IN port.) |
| 4 | HDMI IN | Connect to HDMI source device such as DVD player or PS4. |
| 5 | DC 5V | Plug the 5V/1A DC power supply into the unit and connected the adapter to an AC outlet. |

6. Application Example

